

IEPE Three-axis micro-miniature accelerometer

DETAILS

The B01YG36 B02YG36 three-axis micro-miniature accelerometer features a piezoelectric ceramic shear structure, offering a wide-band frequency response and a custom ASIC signal conditioning circuit. The housing is made of a low-density titanium alloy and is laser-welded; it includes an integrated insulated mounting bracket to ensure isolation from ground.


FEATURES

- Wide-band frequency response
- Custom ASIC signal conditioning circuits
- Shear structure, stable and reliable
- Insulated mounting base as standard


TYPICAL APPLICATIONS

- Drop testing and packaging testing
- Powertrain NVH testing
- Equipment testing with limited installation space
- Testing of small components
- Environmental stress screening tests


Fig_1 Picture of BXXYG36

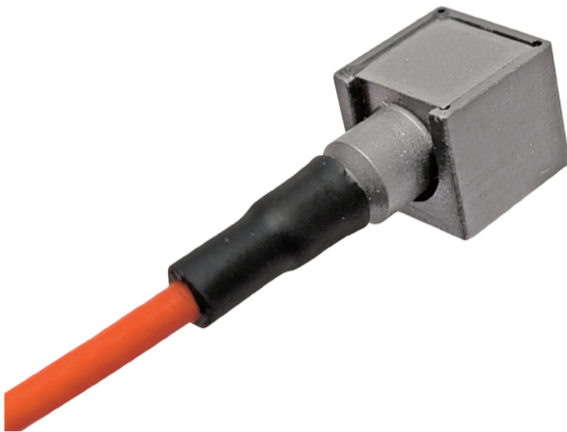


Fig_3 Dimensions of BXXYG36

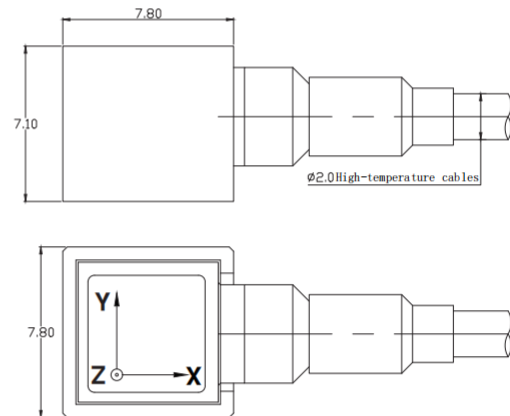

Fig_4 Typical Temperature Response

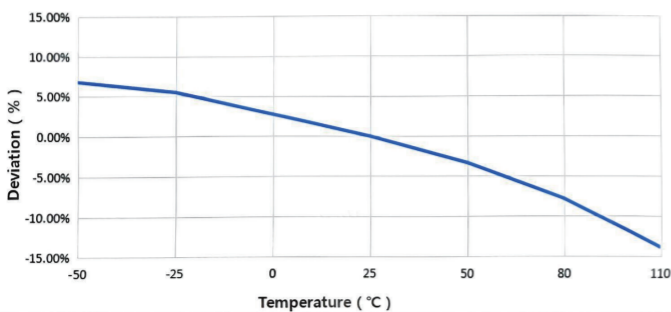

Fig_5 Typical Frequency Response

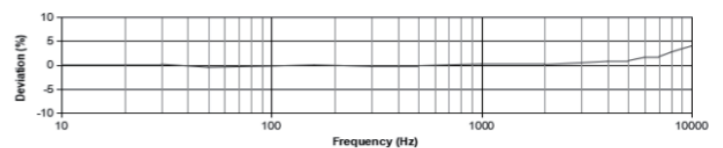

Specifications-B01YG36 B02YG36

MODEL NUMBER		UNIT	B01YG36	B02YG36
PERFORMANCE				
Sensitivity ¹		mV/g	5(±20%)	10(±20%)
		mV/(m/s ²)	0.5	1
Measurement Range		g	±1000	±500
Broadband Resolution ²		g rms	0.002	0.001
Non-Linearity ³		%	1	
Frequency Range	± 5%	Hz	5-8k	5-6k
	±10%		2-10k	2-8k
Resonance Frequency ²		Hz	≥20k	≥20k
Discharge Time Constant ²		s	≤1	
Transverse Sensitivity		%	≤5	
ELECTRICAL				
Excitation Voltage		VDC	20-30	
Constant Current Excitation		mA	2-20	
Output Impedance		Ω	≤100	
Output Bias Voltage		V	8-12	
Electrical Isolation		Ω	≥1*10 ⁸	
Spectral Noise ²	10Hz	μg/√Hz	300	150
	100Hz		80	40
	1000Hz		40	20
ENVIRONMENTAL				
Sinusoidal Vibration Limit ⁴		g rms	2000	1500
Shock Limit ⁴		g pk	3000	2000
Temperature Range		°C	-50-100	
		°F	-58-212	
Temperature Response ²		-	See typical curve	
PHYSICAL				
Sealing		-	Laser welding IP68	
Sensing Element		-	Piezoelectric ceramics	
Housing Material		-	Titanium Alloy	
Size		mm	7.8*7.8*7.1	
		in	0.307*0.307*0.280	
Electrical Connector		-	Connected cable	
Mounting Thread		-	Adhesive	
Weight ²		g	1.5	1.5
		oz	0.053	0.053
Mounting Torque		-	-	
Recommended Accessories	Cable	-	BB	
	Mounting Base	-	-	

Additional Information

Note:

- @ 160Hz, 24VDC, 4mA conditions
- Typical values
- JBT 6822-2018 7.12.1 Vibration Testing Method
- References the mechanical structure of the sensor not being damaged in a non powered state, rather than in a working state
- Some products may have changes in size after adding TEDS

BXXYG36

Supplied Accessories:

- Product Verification Report

COMPLIANCE WITH STANDARDS

