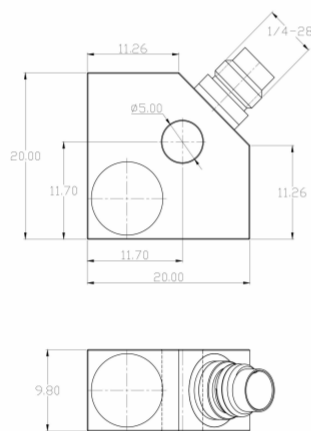


Universal Testing Type Accelerometer


DETAILS

B06YG5 triaxial acceleration sensor, using piezoelectric ceramic shear structure, with a wide band frequency response, high-quality piezoelectric ceramic with long-term stability can ensure years of accurate measurement. Built-in low impedance circuit, low noise, better sensitivity temperature response and other characteristics. The shell is made of titanium alloy with less density and laser welding. Double-layer shielding structure, anti-interference ability is stronger.

Fig_1 Dimensions of B06YG5



Fig_2 Typical Temperature Response

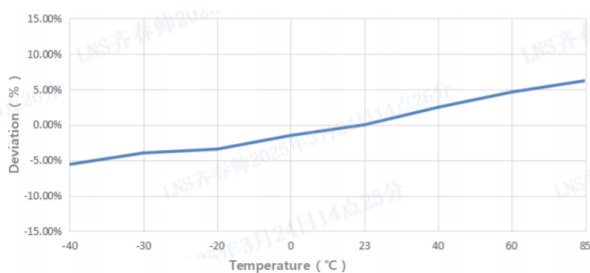

FEATURES

- IEPE Universal Acceleration Sensor
- Standard series with multiple range options
- Shear structure
- Broadband response


TYPICAL APPLICATIONS

- HASS/HALT
- Automotive NVH testing
- General vibration monitoring
- General 3-axis vibration measurement



B06YG5

Fig_3 Typical Frequency Response

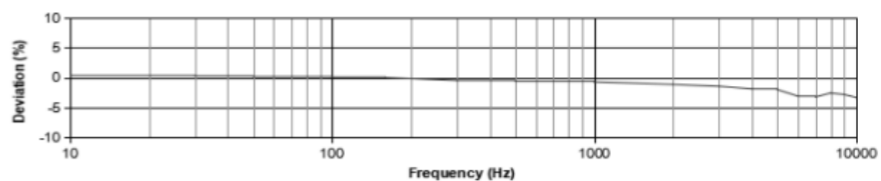

Specifications-B06YG5

MODEL NUMBER		UNIT	B06YG5
PERFORMANCE			
Sensitivity ¹		mV/g	100
		mV/(m/s²)	10
Measurement Range		g	±50
Broadband Resolution ²		g rms	0.001
Non-Linearity ³		%	1
Frequency Range	± 5%(Hz)	Hz	1-10k
	±10%(Hz)		0.5-11k
Resonance Frequency ²		Hz	XY:30k Z:50k
Discharge Time Constant ²		s	≤1
Transverse Sensitivity		%	≤5
ELECTRICAL			
Excitation Voltage		VDC	20-30
Constant Current Excitation		mA	2-20
Output Impedance		Ω	≤100
Output Bias Voltage		V	8-12
Electrical Isolation		Ω	≥1×10 ⁸
Spectral Noise ²		μg/√Hz	10Hz: 15
			100Hz: 4
			1000Hz: 2
ENVIRONMENTAL			
Sinusoidal Vibration Limit ⁴		g	800
Shock Limit ⁴		g	2000
Temperature Range		°C	-40~85
		°F	-40~185
Temperature Response ²		%/°C	0.1
PHYSICAL			
Sealing		-	Laser welding IP68
Sensing Element		-	Piezoelectric ceramics
Housing Material		-	Titanium Alloy
Size	mm	20×20×9.8	
	in	0.787×0.787×0.386	
Electrical Connector		-	1/4-28 4-pin
Mounting Thread		-	φ5.0 THRU
Weight ²	g	15	
	oz	0.529	
TEDS Optional ⁵		-	Yes

Additional Information

Note:

1. @ 160Hz, 24VDC, 4mA conditions
2. Typical values
3. JBT 6822-2018 7.12.1 Vibration Testing Method
4. References the mechanical structure of the sensor not being damaged in a non powered state, rather than in a working state
5. Some products may have changes in size after adding TEDS

B06YG5

Supplied Accessories:

- Product Verification Report
- Install Screws

OPTIONAL VERSIONS

COMPLIANCE WITH STANDARDS



LNS Intelligent Technology Co., Ltd

NO.3 Building
Qilu High-Tech District, Qihe,Dezhou
Shandong Province, China 251100
+86-534-2150417

International:

9620 NE Tanasbourne Dr Ste 300
Hillsboro, OR, USA 97124
+1-503-208-5512
info@lnsdynamics.com